
Evandy precinct: corrective brief

A detailed, evidence-led rebuild specification for Claude. Correct the building masses, balconies/galleries, columns, wall partitions, windows, doors, roof geometry and ground treatment demonstrated by these eight pairs.

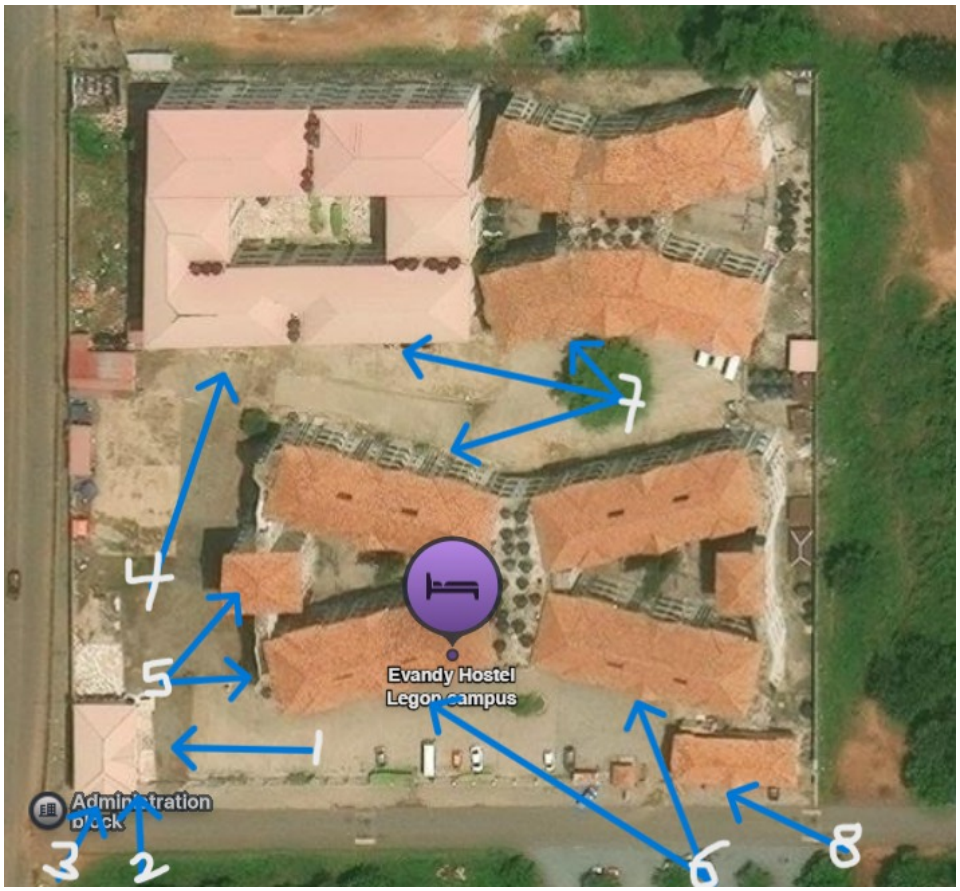

Scope: surrounding small buildings, administration/Tropiks frontage, residential wing elevations, main entrance, inner court and commercial arcade. Each pair remains game first, real second. The supplied map controls the view association; its arrows are not measured camera positions.

Critical: treat each elevation as a separate design. Do not reuse one generic facade, copy every arch onto every floor, invent pillars on blank walls or replace an open balcony/gallery recess with a solid glass window grid.

All 16 comparison images and the original annotated map are included. This document does not claim surveyed dimensions or completed game edits. The supplied real images govern visible detail; concealed features stay provisional.

01 / Ordered source and object index

G = supplied current game view. R = supplied real target. Keep this exact pairing and order; filenames identify the original files for native-resolution inspection.

Pair 1 / G01 image(20261014-092341).png
R01 image(20261014-092348).png

Pair 2 / G02 image(20261014-092355).png
R02 image(20261014-092405).png

Pair 3 / G03 image(20261014-092423).png
R03 image(20261014-092429).png

Pair 4 / G04 image(20261014-092437).png
R04 image(20261014-092446).png

Pair 5 / G05 image(20261014-092500).png
R05 image(20261014-092506).png

Pair 6 / G06 image(20261014-092521).png
R06 image(20261014-092533).png

Pair 7 / G07 image(20261014-092540).png
R07 image(20261014-092603).png


Pair 8 / G08 image(20261014-092706).png
R08 image(20261014-092711).png

M1 Screenshot 2026-10-14 093006.png

Identity rule. Map labels 1-8 refer to view families, not official block names. Use descriptive scene IDs until building identity is verified. Pair 1 is the small porch/stair building; 2/3 the administration-side Tropiks frontage; 4/5 residential side/service elevations; 6 gate/front; 7 multi-direction inner court; 8 roadside commercial arcade.

Duplicate-target rule. Pairs 2 and 3 show the same Tropiks real frontage image with two game viewpoints. They are two checks on one corrected facade, not two separate restaurant assets. Pair 7 has several arrows from one inner-court location and must be reconciled across neighboring views.

02 / Map registration and view families

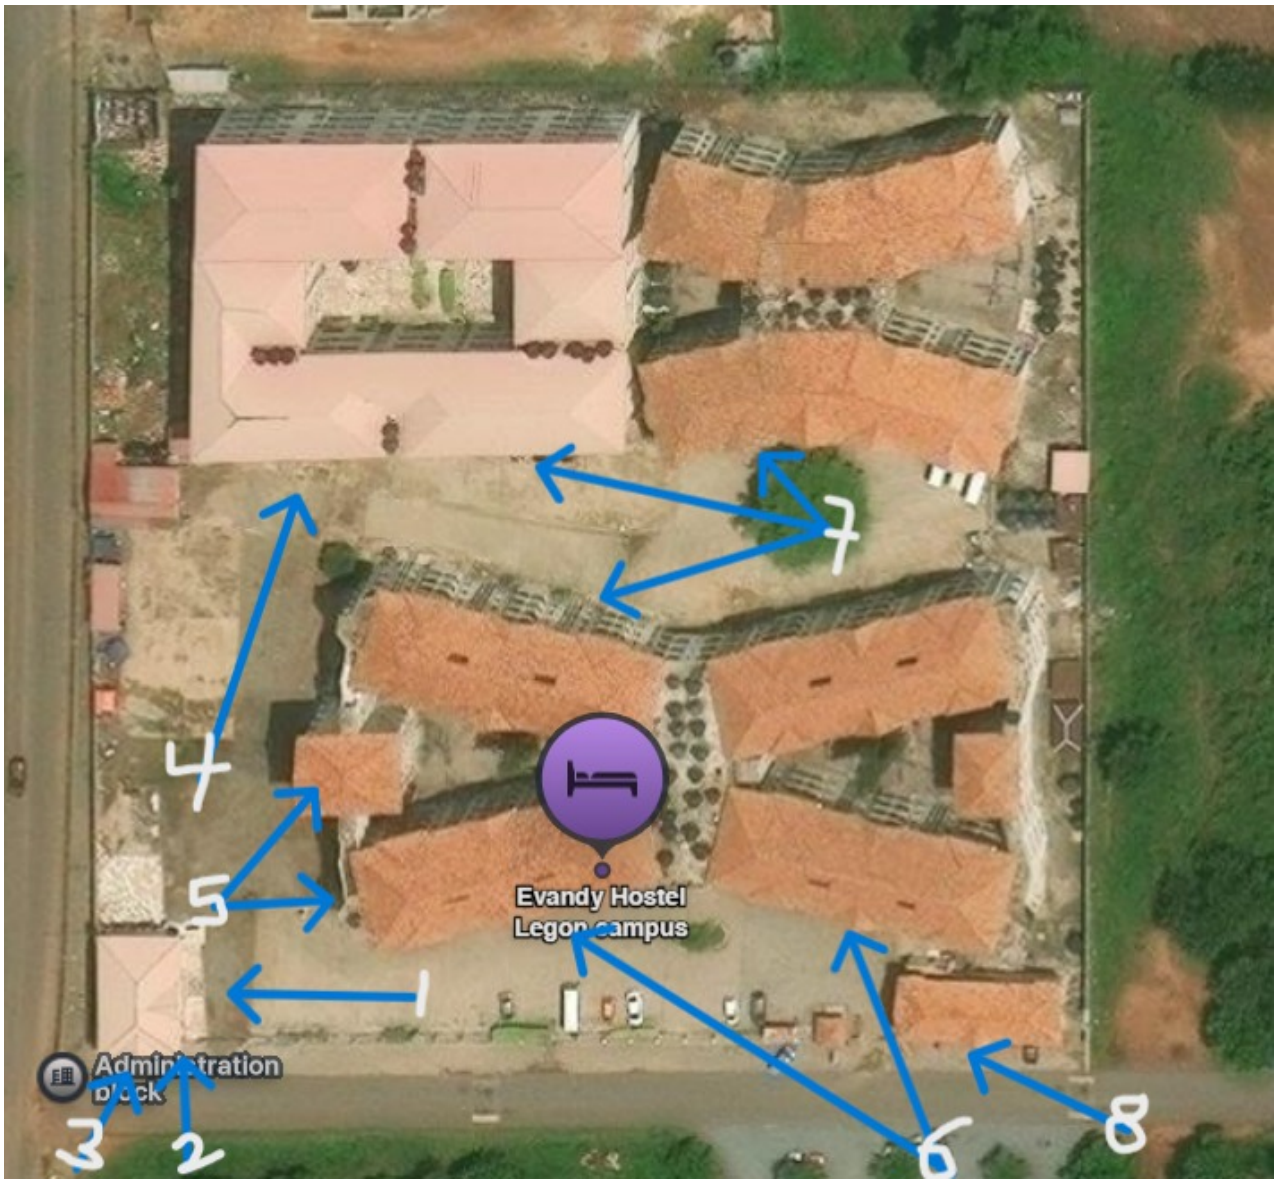

Map-relative reading. 1 points from the lower approach toward the small lower-left roof; 2/3 mark the administration-side lower-left frontage; 4 looks up the left-side route toward a residential elevation; 5 has two directions around the central-left building junction.

Main frontage and court. 6 combines views from the lower road toward the main hall/gate; 7 has multiple directions within the broad inner paved court; 8 points toward the lower-right roadside roof/frontage. Follow the drawn arrow tips and surrounding roof relationships.

Registration. Match road edge, administration block, lower-right arcade and major roof/void outlines to game footprint IDs. Fit scale/rotation/translation and verify adjacency. Do not assign compass directions from this crop or treat an arrow origin as a surveyed camera coordinate.

03 / Mandatory inspection before edits

1 / Inspect original-resolution images. Open all G/R files and M1. Inspect whole elevations, then crop by floor, bay, entry, stair tower and roof junction. Enlarging a PDF thumbnail is insufficient; zoom cannot recover blurred/hidden detail.

2 / Create an evidence ledger. For each object/elevation/floor/bay: record source ID, feature type, visible count, left-to-right order, relative position/width/height, sill/head level, recess/projection, material/opening state, confidence and unresolved notes. Include blank walls as explicit records.

3 / Separate feature classes. Distinguish columns from wall piers/dividers; window frames from security grilles; open galleries from glazed rooms; balcony parapets from rails; ventilation blocks from glass. A dark rectangle is not automatically a window.

4 / Derive geometry before decoration. Trace outer mass, recess volumes, floor lines, projection offsets and roof pieces first. Then place the actual supported openings and rails. Do not make a flat mesh with black stickers stand in for a deep gallery.


5 / Audit per elevation. Use repeated modules only after confirming repetition on that face. Preserve irregular/special bays, service strips, arch locations, wider openings and ground-level differences. Do not spread the arcade or hostel design onto the smaller buildings.

6 / Proof and rejection. Submit annotated source crops, the ledger and matched reference/game renders. Audit floor/bay count and position. Any known misplaced pillar, opening, wall division or roof junction fails that elevation until corrected.

7 / Unknown evidence. Keep concealed bays, exact dimensions and inferred camera positions provisional. No fabricated metre values or exact RGB claims. Do not place unsupported details merely to fill a visually empty patch.

Pair 1 / game and real target

CURRENT GAME / G01

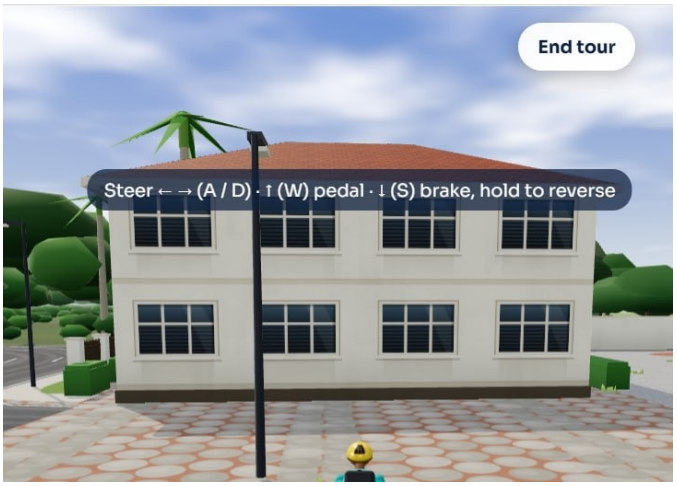

REAL TARGET / R01



Small porch and external-stair block

Observed mismatch. The game is a plain two-row window box. The target is a small two-storey pale-yellow building with an upper porch/balcony, arched entry recess, supported ground portico/garage and an external stair on the right.

Map key. Follow the user's M1 label 1 and its arrow direction(s). Capture a matched game camera after registering the footprint. The reference and current screenshot may have different lens/crop/height.

The next page enlarges the real evidence; the following page gives the detailed build and acceptance instructions. Original files are indexed on page 2.

Pair 1 / numbered real evidence

Crop removes irrelevant sky/edge content only. Annotation numbers refer to features on this plate, not official building or block numbers.



1 / Intersecting pitched roof. Red tile roof with a projecting front gable over the arched porch; several ridge/hip intersections and eaves are visible.

2 / Upper balcony/porch. Recessed entry under an arch, shallow projecting floor slab and thin metal rail. Doors are behind the porch, not a new continuous glass wall.

3 / Lower supported portico. Slender yellow supports frame the white shutter/garage-like door below. Count and locate the visible supports from the original; do not replace them with wall paint.

4 / External right stair. Sloping stair flight, landing, balustrade and return access. Preserve its elevation change and connection to the upper balcony.

5 / Room windows. Left side has discrete upper/lower rectangular window groups; the right entry/stair zone has a different opening pattern.

Pair 1 / required corrections

Replace the facade template. Retain two occupied levels but subdivide the front into room-window side, porch/entry centre and right external stair. Remove the game's four uniform upper and four uniform lower windows where the reference has portico/entry/stair construction.

Column placement. Place slender circular-looking yellow supports only at the supported lower portico and porch locations evidenced by R01. Keep front wall returns separate from columns; check the spacing around the white shutter.

Balcony and stair. Model the upper projecting slab, actual rail depth, arched recess and stair/landing geometry. Avoid a balcony pasted flush against a flat facade. Preserve a usable route under/around the stair if supported.

Roof and material. Use pale yellow/cream walls, warm red-orange tiles, light rails and a white shutter. Build intersecting roof pieces rather than one generic flat hip. Keep eave/fascia detail modest and source-based.

Ground context. R01 shows a broad dark grey hardstand/parking surface and peripheral boundary/woodland, not the game's all-over red-and-white circular paving. Match region boundaries; transient bus/vehicles are optional scale clues.

Acceptance. Matched R01 overview shows front gable/arch, upper rail/entry, supported lower shutter bay, correct left windows and right stair. Compare overhead to map 1; do not apply this design to the restaurant or hostel wing.

Pair 2 / game and real target

CURRENT GAME / G02



REAL TARGET / R02



Administration-side Tropiks frontage

Observed mismatch. The game gives this frontage a white residential window grid behind a fence. The real view is a warm cream/yellow two-level commercial frontage: upper framed/grilled windows, a gable, wine fascia and broad ground-level shop glazing/doors.

Map key. Follow the user's M1 label 2 and its arrow direction(s). Capture a matched game camera after registering the footprint. The reference and current screenshot may have different lens/crop/height.

The next page enlarges the real evidence; the following page gives the detailed build and acceptance instructions. Original files are indexed on page 2.

Pair 2 / numbered real evidence

Crop removes irrelevant sky/edge content only. Annotation numbers refer to features on this plate, not official building or block numbers.



1 / Front gable and eaves. Sloped gable facade under a pitched roof with visible soffit/fascia. Do not keep the game's flat-looking upper eave line here.

2 / Upper windows. Framed upper windows with grilles/deep dark interiors and raised/light surrounds; the visible groups vary with crop.

3 / Tropiks identity and band. TROPIKS / Restaurant | Grill sign above a wine/reddish horizontal frontage strip. Use legible observed wording; small phone text is optional.

4 / Shopfront. Multiple broad lower glazed/metal-framed door/panel bays, a recessed entry and low landing/step. It is not a row of small residential windows.

5 / Forecourt. Weathered round-pattern hard surface with warm earthy seams. Keep scale and wear; do not make every disk bright white.

Pair 2 / required corrections

Shared asset with Pair 3. Register map 2/3 to the same frontage. Implement one evidence-based restaurant facade and check both G02 and G03 viewpoints; do not clone a new restaurant for each pair.

Ground and upper separation. The upper floor has separate framed window groups. The ground floor has commercial glazed/door openings and a canopy/band line. Build these as different schedules and remove incompatible small lower-window repetitions.

Recess and surrounds. Give windows real reveals and raised surrounds where visible. Keep grilles behind/in front of glazing according to the crop. Frame mullions must follow the source rather than the game's universal cross grid.

Front edge. Reconstruct the low step, shop threshold and paved access. A game fence currently crosses the sightline; confirm any real boundary from map/adjacent evidence before retaining it across the commercial doors.

Materials/sign. Warm cream/yellow plaster, dark framed lower glass, wine horizontal fascia, light window surrounds and pitched roof/eaves. Do not apply the white/wine single-storey rule from another campus correction to this two-level frontage.

Acceptance. R02 matched angle shows a commercial ground opening schedule, upper window surrounds, gable/eave, sign/band and unobstructed entrance. Cross-check Pair 3 before completion.

Pair 3 / game and real target

CURRENT GAME / G03



REAL TARGET / R03



Same Tropiks asset: second game angle

Observed mismatch. This second game angle repeats a small uniform residential-window facade and boundary treatment. The real target repeats the Tropiks reference from Pair 2, so both directions must validate one consistent corrected frontage.

Map key. Follow the user's M1 label 3 and its arrow direction(s). Capture a matched game camera after registering the footprint. The reference and current screenshot may have different lens/crop/height.

The next page enlarges the real evidence; the following page gives the detailed build and acceptance instructions. Original files are indexed on page 2.

Pair 3 / numbered real evidence

Crop removes irrelevant sky/edge content only. Annotation numbers refer to features on this plate, not official building or block numbers.



1 / Gable profile. Same roof/eave reference as Pair 2. Use one roof solution on the same mapped asset.

2 / Upper surrounds and grilles. Preserve separate rectangular window groups and light projecting surrounds.

3 / Commercial sign/fascia. Sign and wine band belong above the lower storefront, not at a random residential sill level.

4 / Entry and lower frames. Multiple door/panel divisions and recessed access remain consistent when viewed obliquely.

5 / Ground pattern. Round-pattern weathered paving remains a ground surface; do not extrude circles into raised obstacles.

Pair 3 / required corrections

Remove conflicting procedural outputs. If G02/G03 use different generators or duplicated meshes, resolve the owning asset and eliminate inconsistent duplicate facades. The correction must survive both view directions and reload.

Perspective-aware check. Compare only visible bays after matching orientation/crop. A partly cropped edge is not proof of an extra window. Register the same corner/eave and door centre before counting.

Boundary check. G03 has a fence/wall between viewer and lower face. The real shopfront is directly accessible from its forecourt. Retain/move/remove the boundary only after identifying the real access path and map relationship.

Avoid unsupported wraparound. The repeated real image is one face. It does not establish every hidden side of the administration building. Document assumptions for unseen returns instead of copying commercial glass onto all sides.

Acceptance. Both Pair 2 and Pair 3 cameras show the same gable, upper windows, wine fascia and lower shop entry in correct perspective. No incompatible second facade or fence blocks the confirmed shop access.

Pair 4 / game and real target

CURRENT GAME / G04



REAL TARGET / R04



Residential wing: recesses and service strips

Observed mismatch. The game shows a long flat facade of small repeated cross-grid windows. The real elevation has wide recessed rectangular gallery/opening zones, solid parapet walls, internal grilles, yellow vertical service recesses and a distinct central white strip.

Map key. Follow the user's M1 label 4 and its arrow direction(s). Capture a matched game camera after registering the footprint. The reference and current screenshot may have different lens/crop/height.

The next page enlarges the real evidence; the following page gives the detailed build and acceptance instructions. Original files are indexed on page 2.

Pair 4 / numbered real evidence

Crop removes irrelevant sky/edge content only. Annotation numbers refer to features on this plate, not official building or block numbers.



1 / Hipped roof and deep eave. Long warm tiled roof with roof-edge shadow and broad projection; keep correct end hips.

2 / Wide recessed openings. Openings are wider than the game windows and have thick white reveals/parapets with darker inner grilles/windows. Preserve depth.

3 / Different-width gallery groups. Some spans are paired by a central pier. Do not replace wide paired groups with a row of identical small squares.

4 / Central narrow/service zone. Solid white vertical strip with small square ventilation openings and pipe context, not a continuous glass ribbon.

5 / Yellow recess and end section. Yellow recessed service strips and a separate right-end windowed/ribbed part break the facade; keep these local differences.

Pair 4 / required corrections

Occupied floors. Four main occupied tiers are visible in R04. Keep ground plus three upper levels for this face; do not count roof/eave zones or the tank as extra floors.

Rebuild facade depth. Map the broad upper recesses and parapet bands. Position inner grilles/windows behind the outer opening plane. At ground level larger grilled window groups differ from the open upper gallery appearance.

Wall divisions. Record all wide blank piers, central white strip, yellow recessed strips and paired-opening dividers. Preserve their widths relative to the openings. Do not add decorative columns to every window edge.

Service details. Keep small ventilation apertures and a few visible pipes local. The dark water tank appears near the returning right roof/service area; confirm its association before placing it on the wrong wing.

Ground. R04 has road/parking hardstand, curb/parking edges and small bushes/tree pockets near the facade. Remove invented dominant tree islands or dense garden beds where they occupy the real hardstand.

Acceptance. R04 matched crop shows four tiers, broad recessed openings, correct paired spans, white/yellow vertical divisions, hipped roof and ground grilles. Calibrate end/junction geometry with Pair 5 and the inner-court view.

Pair 5 / game and real target

CURRENT GAME / G05



REAL TARGET / R05



Residential junction and screened stair tower

Observed mismatch. The game uses broad black projecting balcony fronts, red screen rectangles and a largely blank adjoining wing with narrow windows. The real view has a curved/parapeted projecting balcony stack, open recessed connector galleries, exposed rectangular ground bays and a separate screened stair/service tower.

Map key. Follow the user's M1 label 5 and its arrow direction(s). Capture a matched game camera after registering the footprint. The reference and current screenshot may have different lens/crop/height.

The next page enlarges the real evidence; the following page gives the detailed build and acceptance instructions. Original files are indexed on page 2.

Pair 5 / numbered real evidence

Crop removes irrelevant sky/edge content only. Annotation numbers refer to features on this plate, not official building or block numbers.



1 / Left roof and volume. Pitched tile roof above a distinct projecting wing, with a local front gable and overhang.

2 / Stacked projecting balconies. Curved/light solid parapets and side openings; no broad black slab facade with universal cross-grid glass.

3 / Connector recesses. Upper connector contains large rectangular open bays with thin horizontal rails. Preserve the voids and differences between levels.

4 / Ground opening and gate. Large exposed rectangular ground bays with real support divisions and a local metal gate. These are not small punched windows.

5 / Perforated screen tower. Terracotta perforated blocks on visible tower faces; multiple panel sizes and intervening white wall strips, not one red wallpaper grid.

6 / Local stair/balcony openings. Narrow open bays/rails beside the screen tower and vertical pipes have their own rhythm. Tank/flat roof cap is local.

Pair 5 / required corrections

Split the mass. Model left projecting balcony wing, central open connector and right screened service/stair volume separately. Reconcile their footprints to map arrows 5. Do not keep the game's adjoining blank wall where R05 shows open connector bays.

Balcony shape. Replace thick black front rectangles with the observed light curved/solid parapets and small rails/openings. Preserve setback/depth and stacked slab geometry; inner windows remain behind balcony edges.

Connector floor schedule. Count covered opening rows and the roof terrace/cap separately. The connector differs from the taller wing/tower. Do not force every component to share the same facade/floor module.

Ground piers. Place the visible rectangular supports dividing the large ground voids exactly from the crop. Keep gate threshold clear; no invented columns between every small upper opening.

Screen construction. Use actual perforated terracotta block pattern with holes/shadow. Keep panel bounds and blank white breaks on each visible tower face. Roof/tank and pipes must follow the local service volume.

Acceptance. One matched R05 image shows three distinct masses, correct balcony parapets, open connector, large lower bays/gate and screen tower. Cross-check Pair 4 to prevent contradictory service-strip or roof solutions.

Pair 6 / game and real target

CURRENT GAME / G06



REAL TARGET / R06



Evandy gate and principal frontage


Observed mismatch. The game repeats large upper arches and balcony grids across the frontage, uses spherical post ornaments and an exaggerated bright paving pattern. The real facade uses specific arch/recess locations, yellow vertical accents, a distinctive central sign/stair-glazing bay and gate pillars with lantern fittings.

Map key. Follow the user's M1 label 6 and its arrow direction(s). Capture a matched game camera after registering the footprint. The reference and current screenshot may have different lens/crop/height.

The next page enlarges the real evidence; the following page gives the detailed build and acceptance instructions. Original files are indexed on page 2.

Pair 6 / numbered real evidence

Crop removes irrelevant sky/edge content only. Annotation numbers refer to features on this plate, not official building or block numbers.

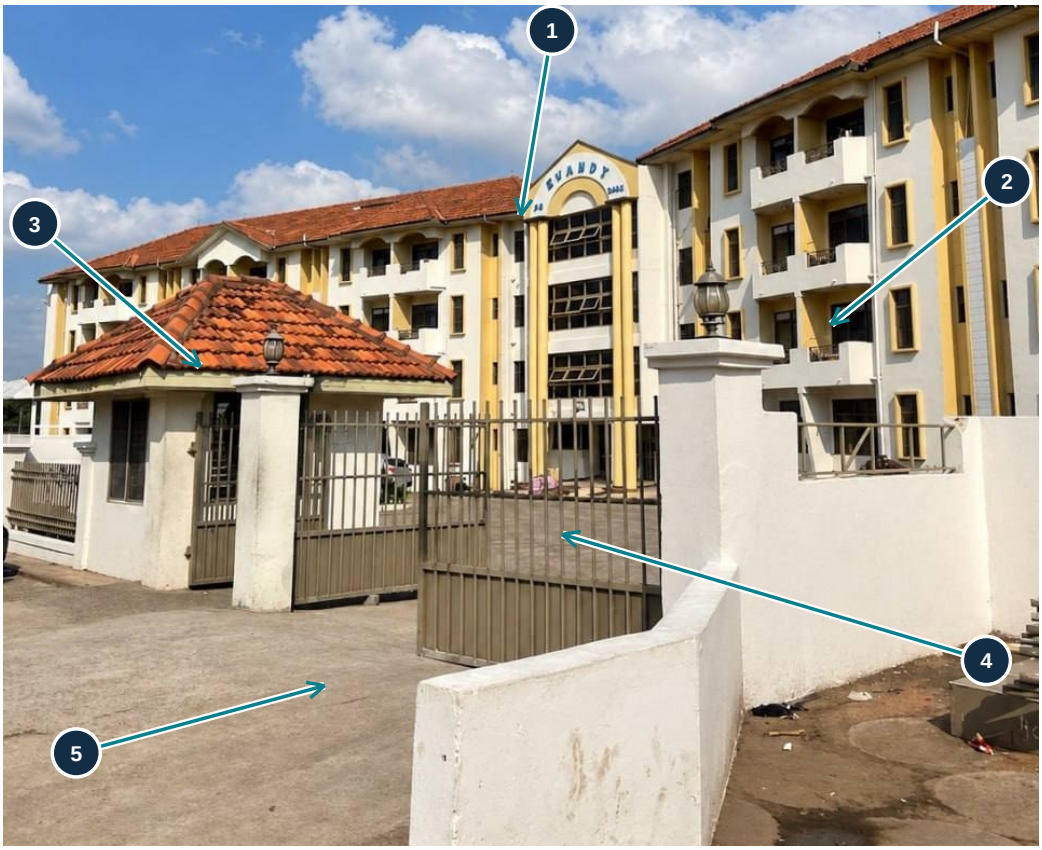

1 / Central identity bay. Arched EVANDY header and yellow vertical side strips framing the central dark glazing/tilting-window bands. Keep this distinct from neighboring rooms.

2 / Frontage gallery rhythm. Light solid balcony parapets with varied rectangular/arched upper recesses and small rails where visible. Do not paste large arches at every occupied floor.

3 / Gatehouse roof. Weathered terracotta hip roof, light small building and separate boundary piers. Match its scale relative to the hall.

4 / Gate and lantern piers. Thin vertical metal gate bars and actual lantern-style post fittings. The game spheres are not the observed lantern design.

5 / Approach and boundary return. Grey/weathered hard surface and curved low white wall return. Do not blanket the gate approach with pristine high-contrast circular paving.

Pair 6 / required corrections

Main facade. Reconcile the photographed upper arch details with the actual stacked balconies and wall panels. Inspect every tier; avoid the current repeated arch pattern where the reference has rectangular openings or solid parapets.

Central bay. Model yellow/light vertical framing, the top EVANDY arch/sign and central angled/opening glass bands. Do not create a glass wall identical to the neighboring balcony windows.

Gate geometry. Retain separate gatehouse, gate leaves, vertical bars, wall/pier caps and local curved boundary return. The reference shows lantern fixtures, not black spheres. Preserve the pedestrian/vehicle passage.

Material. White/off-white plaster, yellow accent/recess regions, dark rail/window material and warm tile roof. Choose calibrated subdued paving tones; fresh orange/white disks are not a neutral substitute for the weathered approach.

Acceptance. Matched R06 angle shows the central sign/bay, correct arch/parapet hierarchy, gatehouse roof, lantern pillars, gate opening and curved boundary. Compare main-wing details with Pair 7 before locking modules.

Pair 7 / game and real target

CURRENT GAME / G07



REAL TARGET / R07



Inner court: multiple wing types


Observed mismatch. The game turns the inner court into uniform repeated patterned paving with a central tree island and generic balcony/window modules. The real court is predominantly open weathered hardstand/parking, with distinct balcony wings and a flatter windowed wing, parked cars and small planted edge pockets.

Map key. Follow the user's M1 label 7 and its arrow direction(s). Capture a matched game camera after registering the footprint. The reference and current screenshot may have different lens/crop/height.

The next page enlarges the real evidence; the following page gives the detailed build and acceptance instructions. Original files are indexed on page 2.

Pair 7 / numbered real evidence

Crop removes irrelevant sky/edge content only. Annotation numbers refer to features on this plate, not official building or block numbers.

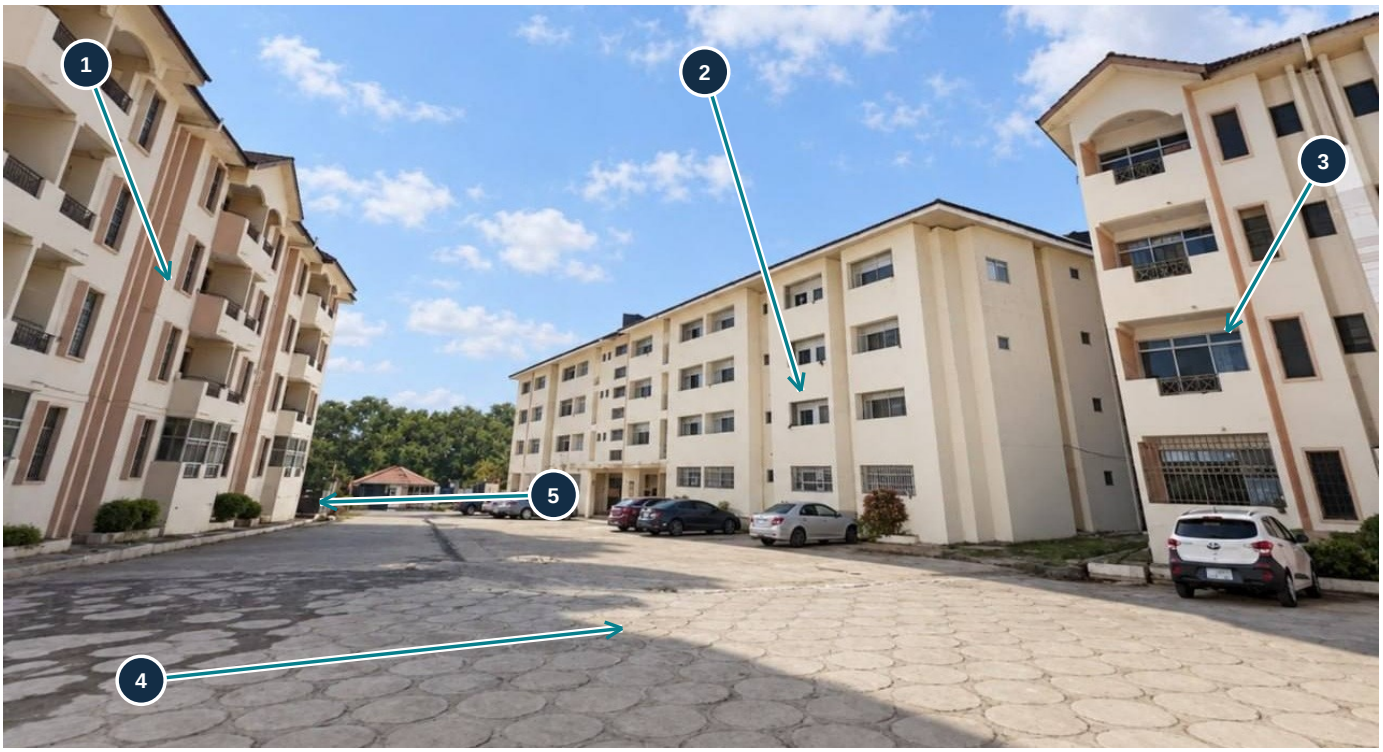

1 / Left balcony wing. Projecting balcony forms, light wall divisions, railings and vertical accent strip. It is not the same facade as the far flat wing.

2 / Far windowed wing. Broad pale four-tier windowed facade with varied bay groupings and vertical divisions. Keep its simpler roof/edge distinct.

3 / Right end volume. Local arched upper bay, rectangular lower balcony/window areas and accent strip. Do not copy the arch to every floor.

4 / Open parking court. Weathered grey hardstand with local round-textured patches, asphalt repairs/wear and parked-car edge. No large central planted island is visible here.

5 / Small far shelter and edge planting. Low roofed shelter/building at the far end, compact shrubs and boundary trees. Preserve circulation between parked cars and entrance faces.

Pair 7 / required corrections

Reconcile all three arrows. Map 7 indicates several viewing directions from the inner court. Match left, far and right buildings to their footprint IDs rather than reproducing one facade across the whole court.

Remove the unsupported island. The prominent tree/red-soil island in G07 occupies open hardstand in R07. Remove or relocate it only to source-supported planting areas. Keep the main courtyard open; do not hide errors behind foliage.

Ground material. Use spatial patches: weathered circular-pattern surface in parts, smoother/repaired grey hardstand and edge/parking zones. No uniform pristine red-and-white disk texture across every courtyard surface.

Facade variety. Use separately verified modules for balcony wing, flat windowed wing and special end arch. Ground grilles/window groups differ from upper rail/parapet bays. Preserve adjacent blank wall strips.

Parking and shelter. Keep clear access along the facade and the small far roofed structure. Cars can provide scale but exact transient car positions are optional; they must not become fixed collision traps.

Acceptance. Matched R07 wide view shows open court, three distinct facade types, realistic paved wear, small edge shrubs and unobstructed routes. Cross-check the four-tier flat wing against Pair 4 and frontage against Pair 6.

Pair 8 / game and real target

CURRENT GAME / G08



REAL TARGET / R08



Roadside commercial arcade

Observed mismatch. The game uses broad flat glass bays, misplaced arch fragments and large foreground box-like planters/barriers. The real two-level arcade has a deep upper gallery, a patterned thin metal rail, tall warm-toned columns supporting a projecting gable/arch and recessed ground shop fronts reached by a shallow step.

Map key. Follow the user's M1 label 8 and its arrow direction(s). Capture a matched game camera after registering the footprint. The reference and current screenshot may have different lens/crop/height.

The next page enlarges the real evidence; the following page gives the detailed build and acceptance instructions. Original files are indexed on page 2.

Pair 8 / numbered real evidence

Crop removes irrelevant sky/edge content only. Annotation numbers refer to features on this plate, not official building or block numbers.



1 / Gabled arched entrance bay. Projecting front gable and arched opening at the upper centre, tied to the roof/gallery support; not floating arch fragments under every eave.

2 / Tall columns. Warm pale-yellow vertical columns at the entrance bay connect from the ground to the upper/roof support. Place them at the actual bay positions.

3 / Upper gallery and rail. Deep shadowed corridor behind a thin geometric patterned metal railing. Inner windows/doors sit behind it, not flush glass across the front.

4 / Ground shops and threshold. Recessed commercial glazing/security grille bays, shallow continuous step and local entries. Foreground black/white boxes in the game do not reproduce this access.

5 / Weathered paving. Round-pattern paving in earthy brown/red/grey tones with wear and varied joints; circles read as surface texture, not pristine disks.

Pair 8 / required corrections

Distinct two-level asset. Map 8 points to the lower-right commercial block. Do not apply four-tier residential modules to it, and do not confuse it with the two-level Tropiks frontage at map 2/3.

Column/arch structural relation. Model the supported gable/arch and the confirmed tall columns in one coherent entrance bay. No disconnected arch stubs, random piers or columns blocking shop doors. Count actual supports from the original crop.

Gallery depth. Create the upper recess volume, solid lower parapet edge where shown and the thin patterned rail in front. Preserve background shop/room openings as a separate plane. Avoid a flat black-glass balcony facade.

Ground access. Rebuild the shallow step/landing and grill/glass shopfront rhythm. Remove unsupported bulky box planters/barriers obstructing the real path. Keep commercial doors reachable.

Detail budget. Use a texture/instanced rail module for repeated small geometric patterns, actual meshes for columns/arch/roof silhouette, and simple security-grille material depth. Preserve the major shapes at bicycle distance.

Acceptance. Matched R08 angle shows two levels, supported gabled arch, correctly placed warm columns, upper open gallery/rail, recessed shops and low continuous step. Ground textures match weathering without copying screen overlays or temporary goods.

28 / Cross-pair construction schedule

Different assets. Pair 1 porch/stair block, Pair 2/3 Tropiks frontage and Pair 8 arcade are separate two-level design problems. Pairs 4/5/6/7 are different elevations/junctions within the residential ensemble; they are not permission for one shared facade pattern everywhere.

Per-elevation modules. Build actual repeating bay modules only after the ledger establishes bay width, parapet/recess form and opening schedule. Include overrides for service screens, stair/entry bays, arches, yellow accent recesses, special end blocks and ground grille/door areas.

Count discipline. R04 clearly shows four occupied tiers. R05 connector and roof terrace need their own count; do not force taller-wing counts onto lower connectors. Validate R06/R07 occupied tiers on native-resolution images rather than counting decorative bands or arches.

Roof schedule. Pair 1 intersecting gable/hip porch roof; Pair 2/3 gabled commercial facade; Pair 4 long hipped residential roof; Pair 5 pitched wing plus service/connector caps; Pair 6 gatehouse hip and main facade roofs; Pair 8 commercial gable/gallery. Keep each roof relation.

Ground zoning. Dark hardstand at Pair 1, commercial round-pattern forecourts at 2/3/8, parking/curb zones at 4, junction/service edge at 5, weathered gate approach at 6 and mixed hardstand/pattern court at 7. Do not apply one vivid circular-paver material globally.

Priority. Correct silhouettes and voids, floor/bay layouts, balcony depth, roof junctions and column placement before secondary plants, signs or weathering. Fine texture cannot compensate for an incorrect wall/opening arrangement.

29 / Implementation and verification

Audit owning source. Locate each mapped object in scene/map/procedural code. Record bounds, IDs, generator rules, roof/facade modules, transforms, colliders and shared material assignments. Save eight baseline cameras.

Correct the source. Edit owning geometry/generator data so reload/regeneration preserves the corrections. Remove duplicate stale facades instead of placing a corrected shell on top. Keep unaffected precinct assets stable.

Evidence package. For each pair provide annotated native crops, ledger, matched real/game images and short discrepancy log. For 2/3 and 4/5/6/7 explain how shared-object relationships are reconciled across views.

Placement audit. Check all visible column/pier positions, window/door counts and dimensions relative to bays, parapet height/depth, blank wall spans, rail plane, arch floor and roof line. Reject extra openings/arches or unsupported supports.

Collision test. Ride gate approach, inner court, commercial steps/access routes and parking edges. Inspect balcony/stair/roof collision only where relevant; ground routes must have no invisible obstructions, holes or clipping.

Performance. Share rail/grille/tile materials and use instancing/LOD for repeated minor detail. Spend mesh budget on real silhouette, columns, arches, balcony recesses and roofs. Record before/after draw calls/frame time on the same route.

Delivery. List modified files/object IDs, verified views, actual tests, unresolved concealed details and assumptions. Do not claim perfect reproduction or physics tests that were not performed.

30 / Consolidated Claude prompt: 1/3

Task. Correct Evandy precinct using this complete eight-pair PDF, all original G01-R08 images and M1 annotated map. Keep pairs in exact order: current game first, real target second. All pair-specific pages and the mandatory inspection protocol are part of this prompt.

Non-negotiable before edits. Inspect native-resolution references and produce a per-object/elevation/floor/bay ledger. Identify every visible pillar, wall division, blank span, opening, balcony, rail and roof junction. Map these to the correct footprint and camera direction; do not invent hidden details.

Pair 1. Replace the generic window box with the observed two-level pale-yellow porch building: intersecting tiled roofs, front gable/arched entry, upper rail/porch, supported lower white shutter bay and right external stair/landing.

Pairs 2 and 3. Correct one shared Tropiks frontage asset, not two. Build cream/yellow gabled commercial face, framed upper windows, wine fascia/sign and broad recessed lower shop glazing/doors/step. Verify both game cameras and prevent a wrong fence from blocking access.

Pair 4. Correct the four-tier residential elevation with broad recessed gallery/opening groups, solid parapets, internal grilles, paired spans, central white/service strip and yellow recessed vertical strips. Remove uniform small cross-grid facade stamping.

Pair 5. Separate projecting curved/light balcony wing, open rectangular connector galleries/large ground bays and perforated terracotta-screen service tower. Count each component separately, preserve rail/recess depth and local roof/tank/pipe associations.

31 / Consolidated Claude prompt: 2/3

Pair 6. Rebuild Evandy principal facade/gate with real arch/parapet hierarchy, yellow accent recesses, central EVANDY arch/sign and dark opening bands. Recreate gatehouse, metal gates, lantern-style post fittings and curved boundary return; remove wrong sphere ornaments.

Pair 7. Match multi-direction court relationships. Keep balcony wings, flat windowed wing and special end bay distinct. Remove unsupported central tree/red-soil island; restore open weathered hardstand/parking, limited edge planting and the far small roofed shelter.

Pair 8. Rebuild the separate two-level roadside arcade: tall warm columns at verified positions, supported projecting gabled/arched upper entry, deep upper gallery, thin patterned rail and recessed ground shops/low step. Remove unsupported foreground box barriers and disconnected arch fragments.

Material/ground rules. Use subdued off-white/cream/yellow wall differences and warm tiled roofs according to each real target. Apply glass, wood/louvre, grille, rail, parapet and ventilation-screen materials to the correct feature. Zone paving/hardstand per pair; no global pristine orange-and-white disk pattern.

No generalized architecture. Do not impose all arches on all floors, all piers on every blank span or identical windows on every elevation. Keep two-level small/commercial blocks separate from residential wings. Only repeat modules whose counts, positions and geometry match the evidence.

Uncertainty. No exact scale, camera survey, hidden floorplan or complete unseen elevations are supplied. Use project scale where available and document estimates. Source zoom/annotations do not authorize hallucinated detail.

32 / Consolidated Claude prompt: 3/3

Implementation. Modify the owning source/generator, preserve stable IDs and remove duplicate stale outputs. Correct full masses and voids first, then floor/bay placement, balcony/column/roof geometry and ground materials. Do not conceal geometry errors behind added trees or signs.

Mandatory comparisons. Return eight matched game views alongside references and enlarged facade crops. Audit source-versus-model opening/column counts, floor order, wall divisions, parapet/recess depth, rail position, arch locations and roof silhouette. Pairs 2/3 must agree as one asset; connected residential views must agree.

Reject and repair. Wrong-floor pillars, windows in blank wall, missing partitions, flat glass in open galleries, universal arch stamping, wrong stair/portico, generic commercial facade, extra floors, distorted roof joints or obstructed access fail the affected elevation. Correct and re-render before marking it complete.

Tests. Verify reload/regeneration persistence. Ride confirmed accessible gate, court, commercial forecourt/steps and parking-edge routes. Check collisions, floating assets, cracks, clipping and z-fighting. Record actual performance and tests run; do not invent results.

Required delivery. Provide changed file/object list, per-pair fix log, annotated evidence/feature ledger, matched renders, test results and unresolved assumptions. Separate observed detail from provisional hidden faces.

Completion standard. Every adequately visible feature must be checked and every known unexplained placement error corrected in verified regions. A generic resemblance, white wall paint or matching map pin is insufficient. Unseen/obscured details remain explicitly provisional.